



NEW

Leakage Current Tester TOS3200

Conforms to international standard IEC 60990
("Methods of measurement of touch current and protective conductor current").

Current measurement range: DC/RMS: 30 μ A to 30 mA, PEAK: 50 μ A to 90 mA

Seven built-in measurement circuit networks conforming to IEC 60990 and other standards.

GPIO, RS-232C, and USB interfaces equipped as standard.

***Conforms to safety standards for general electrical equipment.
Supports all touch current and protective conductor current
(earth leakage current) tests.***



**A leakage current tester has now been added to the TOS Series...
Conforms to international standard IEC 60990 ("Methods of
measurement of touch current and protective conductor current").**

Leakage Current Tester


TOS3200

The Leakage Current Tester TOS3200 is designed to perform leakage current (touch current and protective conductor current) tests on general electrical equipment but not medical electrical equipment. It enables you to conduct tests that conform to the requirements of the applicable IEC, UL, JIS, and other standards, as well as the Electrical Appliance and Material Safety Law. The memory in the main unit stores the 51 types of test conditions laid down in the IEC/JIS standards for information technology equipment, household electrical appliances, audio, video electronic apparatus, luminaires, motor-operated electric tools, and electrical equipment for measurement and control and in the Electrical Appliance and Material Safety Law, thereby enabling you to conduct standard tests with simple panel operation.

●Capable of measuring leakage current in three modes

Touch current (TC) operating mode*

Enables you to measure the touch current flowing between the enclosure (accessible portion) of the electrical equipment under test (EUT) and the power line incorporating the earth wire, via a human phantom circuit. For human phantom circuits, seven measurement circuit networks (NTWKs) conforming to the applicable standards are provided as standard. The switching of the polarities of the power line to the EUT, as well as single-fault conditions, are automatically set with relays inside the tester.

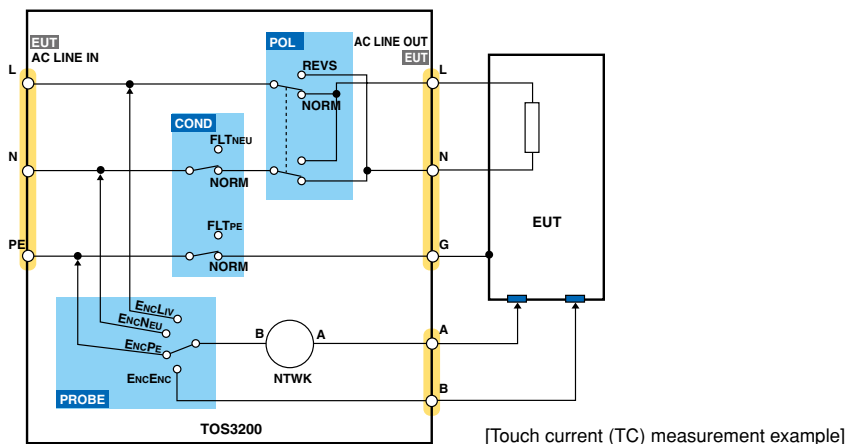

Protective conductor current (PCC) operating mode*

Enables you to measure the current flowing through the protective conductor (earth wire) by connecting the power plug (NEMA5-15 or an equivalent) of an item of 100 V electrical equipment to the socket on the front panel. A multi-outlet is available as an option (sold separately) to accommodate the different plugs used around the world.

Meter (METER) operating mode


In the same way as an ordinary multimeter, enables you to measure voltage and current using measurement terminals A and B on the front panel. For voltage measurement, it offers a "safety extra low voltage" (SELV) detection function; for current measurement, it offers a measurement function using measurement circuit networks (NTWKs).

* TC=Touch Current
PCC=Protective Conductor Current


●Seven built-in measurement circuit networks

It offers built-in seven measurement circuit networks (NTWKs) for measuring the touch current of general electrical equipment.


●Measurement circuit network (network A)




●Measurement circuit network (network B)




●Measurement circuit network (network C)

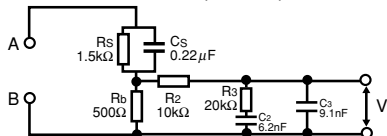


●Measurement circuit network (network D)




●Measurement circuit network (network E)



●Measurement circuit network (network F)



●Measurement circuit network (network G)



●Rear panel





●Up to 30 mA for RMS measurement

Capable of measuring 30 μ A to 30 mA for DC/RMS measurement and 50 μ A to 90 mA for PEAK measurement, both in three ranges. Two range switching functions are provided, namely, a fixed range function (FIX) and auto range function (AUTO), which conform to the current to be measured.

For RMS measurement, the “true root-mean-square value” is achieved.

●Easy-to-understand operation


Simple operation is possible thanks to the intuitively understandable test condition menu and the function keys/rotary knobs.

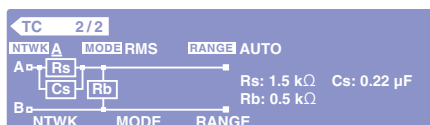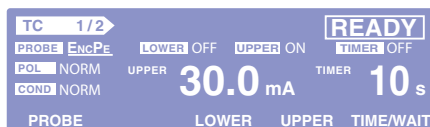

[Setting screen for touch current (TC) measurement]

●Enables the continuous execution of tests

Allows you to automatically conduct TC and PCC tests as a single sequence program by setting their test conditions as up to 100 independent tests (steps). You can set up to 100 sequence programs, with up to 500 steps in total.

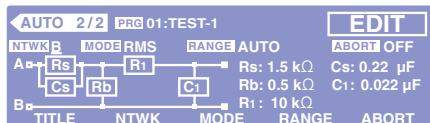

[Setting screen for auto tests]

●Capable of saving test results

For independent tests, enables you to save not only test results but also the test date and time and the test conditions for up to 50 tests; for auto tests, you can save this data for up to 50 programs. You can also save the test results as external records using the USB and other interfaces.

●51 types of standard test conditions are preset

The memory in the main unit is pre-written with 51 types of test conditions for general electrical equipment, which conform to IEC 60990 and the standards listed below. You can set the standard test conditions merely by calling them.

[Standards covered by the memory]

| Standard No. | Applicable electrical equipment |
|--|---|
| IEC60950 | Information technology equipment |
| IEC60335 | Household and similar electrical appliances |
| IEC60065 | Audio, video and similar electronic apparatus |
| IEC60745 | Hand-held motor-operated electric tools |
| IEC60598 | Luminaires |
| IEC61010 | Electrical equipment for measurement, control, and laboratory use |
| Electrical Appliance and Material Safety Law | Electrical appliances |
| IEC61029 | Transportable motor-operated electric tools |

●Lets you manage the calibration time limit

You can set a calibration time limit in the tester, such that when this time limit is exceeded, a warning message appears or the use of the tester is restricted. This is a new feature whereby the tester itself conducts calibration management.

●USB interface provided as standard

In addition to the SIGNAL I/O, GPIB, and RS-232C interfaces, a USB interface is also provided as standard.

●Range of other functions

- “MAX function,” which retains the largest current measured.
- “CONV function,” which converts the measured current value into the corresponding value for the preset power voltage.
- “SELV function,” which causes the DANGER lamp to turn ON if a preset safety extra low voltage (SELV) is exceeded in meter measurement mode.
- “CHECK function,” which performs self-analysis of the measurement circuit networks.

●Options



Multi-outlet [OT01-TOS]



Test probe [HP21-TOS]

Specifications


| Measurement item, measurement mode | | | |
|---|-------------------------------------|--|--|
| Measurement item | | 3 types, namely, touch current (TC) measurement, protective conductor current (PCC) measurement, and METER | |
| Measurement method | TC | Measure the voltage drop across the reference resistor, using a measurement circuit network (NTWK), and then calculate the current. | |
| | PCC | Measure the voltage drop across the reference resistor connected to the protective earth wire, and then calculate the current. | |
| | METER | Measure the voltage and current using the measurement terminals. | |
| Measurement mode | | DC/RMS/PEAK (RMS being the true root-mean-square value) | |
| Measurement circuit network (NTWK) | Network A | Basic measurement element: (1.5 kΩ/0.22 μF) + 500 Ω (conforming to IEC 60990) | |
| | Network B | Basic measurement element: (1.5 kΩ/0.22 μF) + 500 Ω/(10 kΩ + 0.022 μF) (conforming to IEC 60990) | |
| | Network C | Basic measurement element: (1.5 kΩ/0.22 μF) + 500 Ω/(10 kΩ + (20 kΩ + 6.2 nF)/(9.1 nF)) (conforming to IEC 60990) | |
| | Network D | Basic measurement element: 1 kΩ (Electrical Appliance and Material Safety Law, etc.) | |
| | Network E | Basic measurement element: 1 kΩ/(10 kΩ + 11.225 nF + 579 Ω) (conforming to the Electrical Appliance and Material Safety Law) | |
| | Network F | Basic measurement element: 1.5 kΩ/0.15 μF (UL, etc.) | |
| | Network G | Basic measurement element: 2 kΩ (general purpose) | |
| Circuit network constant accuracy | | Resistance: ±0.1%, capacitor 0.15 μF: ±2%, other: ±1% | |
| Current measurement section | | | |
| Measurement range | Range 1 | DC/RMS: 30 μA to 600 μA, PEAK: 50 μA to 850 μA (*3) | |
| | Range 2 | DC/RMS: 125 μA to 6.00 mA, PEAK: 175 μA to 8.50 mA (*3) | |
| | Range 3 | DC/RMS: 1.25 mA to 30.0 mA, PEAK: 1.75 mA to 90.0 mA (*3) | |
| Range switching | | AUTO/FIX | |
| Measured current (i) display resolution | | i < 1 mA: □□□□ μA/1 μA, 1 mA ≤ i < 10 mA: □□□ mA/0.01 mA 10 mA ≤ i < 100 mA: □□□ mA/0.1 mA | |
| Measurement accuracy | Range 1 | DC ±(5.0% of rdng + 20 μA) DC/15 Hz ≤ f ≤ 10 kHz: ±(5.0% of rdng + 5 μA) 10 kHz < f ≤ 1 MHz: ±(5.0% of rdng + 10 μA) PEAK 15 Hz ≤ f ≤ 10 kHz: ±(5.0% of rdng + 10 μA) | |
| | | DC ±(5.0% of rdng + 50 μA) DC/15 Hz ≤ f ≤ 10 kHz: ±(2.0% of rdng + 20 μA) 10 kHz ≤ f ≤ 1 MHz: ±(5.0% of rdng + 20 μA) | |
| | | PEAK 15 Hz ≤ f ≤ 1 kHz: ±(2.0% of rdng + 50 μA) 1 kHz < f ≤ 10 kHz: ±(5.0% of rdng + 50 μA) | |
| | Range 2 | DC ±(5.0% of rdng + 0.5 mA) DC/15 Hz ≤ f ≤ 10 kHz: ±(2.0% of rdng + 0.2 mA) 10 kHz < f ≤ 1 MHz: ±(5.0% of rdng + 0.2 mA) | |
| | | DC ±(5.0% of rdng + 0.5 mA) DC/15 Hz ≤ f ≤ 10 kHz: ±(2.0% of rdng + 0.2 mA) 10 kHz < f ≤ 1 MHz: ±(5.0% of rdng + 0.2 mA) | |
| | | PEAK 15 Hz ≤ f ≤ 1 kHz: ±(2.0% of rdng + 0.5 mA) 1 kHz < f ≤ 10 kHz: ±(5.0% of rdng + 0.5 mA) | |
| | Range 3 | DC ±(5.0% of rdng + 0.5 mA) DC/15 Hz ≤ f ≤ 10 kHz: ±(2.0% of rdng + 0.2 mA) 10 kHz < f ≤ 1 MHz: ±(5.0% of rdng + 0.2 mA) | |
| | | DC ±(5.0% of rdng + 0.5 mA) DC/15 Hz ≤ f ≤ 10 kHz: ±(2.0% of rdng + 0.2 mA) 10 kHz < f ≤ 1 MHz: ±(5.0% of rdng + 0.2 mA) | |
| | | PEAK 15 Hz ≤ f ≤ 1 kHz: ±(2.0% of rdng + 0.5 mA) 1 kHz < f ≤ 10 kHz: ±(5.0% of rdng + 0.5 mA) | |
| | Input resistance, input capacitance | | 1 MΩ±1%, < 200 pF |
| | Common mode rejection ratio | | f ≤ 10 kHz: 60 dB or greater, 10 kHz < f ≤ 1 MHz: 40 dB or greater |
| | Judgement function | | |
| Judgement method | | Pass/fail judgement by setting upper and lower current limits in window comparator mode | |
| Judgement | | U-FAIL for currents above the upper limit; L-FAIL for currents below the lower limit. | |
| Display, etc. | | U-FAIL/L-FAIL/PASS display, buzzer sounding | |
| PASS hold | | The time for which a PASS judgement is retained can be set to 0.2 s to 10.0 s or to HOLD. | |
| Setting range | Range 1 | DC/RMS: 30 μA to 600 μA, PEAK: 50 μA to 850 μA (*4) | |
| | Range 2 | DC/RMS: 151 μA to 6.00 mA, PEAK: 213 μA to 8.50 mA (*4) | |
| | Range 3 | DC/RMS: 1.51 mA to 30.0 mA, PEAK: 2.13 mA to 90.0 mA (*4) | |
| Judgement accuracy | | Conforms to measurement accuracy. (Read rdng as set.) | |
| Measurement of voltage between A and B | | | |
| Measurement range | | DC/RMS: 10.000 V to 300.0 V, PEAK: 15.000 V to 430.0 V | |
| Accuracy | | ±(3% of rdng + 2V), measurement range fixed at AUTO. | |
| Input impedance | | Approx. 40 MΩ | |
| SELV detection | | Set the SELV to detect; if this value is exceeded, the DANGER lamp is turned ON. | |
| SELV setting range | | 10 V to 99 V, in 1-V steps, OFF function provided. | |
| Timer, test execution function, memory | | | |
| Timer | Test wait time | Setting range: 0 s to 999 s, accuracy: ±(100 ppm of set + 20 ms) | |
| | Test time | Setting range: 1 s to 999 s/OFF function, accuracy: ±(100 ppm of set + 20 ms) | |
| Text execution | | | |
| Auto test (AUTO): Automatic execution of up to 100 steps (test conditions) | | | |
| Independent test (MANUAL): Independent execution of TC, PCC, or METER measurement | | | |
| Memory | Test conditions | AUTO: Up to 100 sequence programs can be saved (up to 500 steps in total). MANUAL: Up to 100 sequence programs can be saved. | |
| | Test results | The user can select whether to save the judgement results when they are output at the end of the tests. AUTO: Test results for up to 50 programs can be recorded. MANUAL: Test results for up to 50 tests can be recorded. | |

- * The warm-up time must be 30 minutes or longer.
- * rdng denotes a reading, set denotes the set value, and EUT is the electrical equipment under test.

- *1. May not apply to custom-made or modified products.
- *2. Limited to products with CE marking on their panels.
- *3. The maximum range is indicated. The range differs depending on the measurement circuit network.
- *4. The maximum range is indicated. The range differs depending on the measurement circuit network. Also, the UPPER setting in each range when the FIX range is selected is indicated.

| Other functions | | |
|---|--|--|
| Measured value conversion (CONV) | Converts the measured current value into the corresponding value at the preset power voltage. Setting range: 80.0 V to 300.0 V, OFF function provided. | |
| MEASURE MODE | Selects a measured value from those below. | |
| | NORM: Displays the measured value in the measurement period. | |
| | MAX: Displays the largest measured value in the measurement period. | |
| Power positive/negative phase selection (POL) | NORM: Positive phase connection, REVS: Negative phase connection | |
| Single fault selection (COND) | NORM: Normal, FLTNEU: Disconnection of the neutral wire, FLTPE: Disconnection of the protective earth wire | |
| Earth check | Generates CONTACTFAIL if the enclosure is grounded in a TC (EncLiv, EncNeu) test. | |
| MEASURE CHECK | Checks the measurement function between measurement terminals A and B, and places the tester in the PROTECTION state if an error is detected. | |
| Power voltage measurement | Measurement range: 80.0 V to 250.0 V, resolution: 0.1 V, accuracy: $\pm(3\% \text{ of rdng} + 1 \text{ V})$ | |
| Power current measurement | Measurement range: 0.1 A to 15.00 A, resolution: 0.01 A, accuracy: $\pm(5\% \text{ of rdng} + 30 \text{ mA})$ | |
| Power measurement (effective power) | Measurement range: 10 W to 1500 W Accuracy (at a power voltage of 80 V or higher and a load power factor of 1): $\pm(5\% \text{ of rdng} + 8 \text{ W})$ | |
| System clock | Recording | Items: Calibration date and time, test date and time, permissible date and time: Up to 2099 |
| | Calibration time limit management (CAL PROTECT) | Enables the setting of a calibration time limit. Once this time has passed, a warning is output at power on. ON: Places the tester in the PROTECTION state (disables the use of the tester), OFF: Displays warning. |
| Protective operation | Relay operation error, overload, over range, measurement function check, failure of internal battery, etc. | |
| Interface | | |
| RS-232C | D-Sub 9-pin connector (conforming to EIA-232D), baud rate: 9600/19200/38400 bps (For connection to a PC, use a "9-pin female-female reverse" cable.) | |
| GPIB | Conforms to IEEE Std. 488-1978. (SH1,AH1,T6,TE0,L4,LE0,SR1,PP0,DC1,DT0,C0,E1) | |
| USB | USB Specification 2.0 | |
| REMOTE | 6-pin MINIDIN connector (for HP21-TOS (separately sold option) only) | |
| SIGNAL I/O | 25-pin D-Sub connector | |
| General | | |
| Measurement terminals | Rated voltage/current | Terminals A to B: 250 V, terminal to chassis: 250 V, 100 mA |
| | Measurement category | CAT II |
| Environment | Effective terminal display | Terminals effective to measurement are indicated with LED lamps. |
| | Specification assured range | Temperature: 5 °C to 35 °C, humidity: 20% rh to 80% rh (no condensation) |
| | Operating range | Temperature: 0 °C to 40 °C, humidity: 20% rh to 80% rh (no condensation) |
| | Storage range | Temperature: -20 °C to 70 °C, humidity: 90% rh or less (no condensation) |
| Power | Mounting location | Indoors, altitude of 2000 m or less |
| | Input power | Input voltage: 85 Vac to 250 Vac, frequency: 50/60 Hz, power consumption: 70 VA max. AC LINE (for EUT) Rated output capacity: 1500 VA, maximum current: 15 A, rush current: 70 A peak max. (within 20 ms) |
| Insulation resistance | 30 MΩ or greater (500 Vdc) (between AC line and chassis, between measurement terminal and chassis) | |
| Withstand voltage | 1390 Vac, 2 seconds/20 mA or less (between AC line and chassis) | |
| Earth continuity | 25 Aac/0.1 Ω or less | |
| Safety (*1) | Conforms to the requirements of the directive and standard below. Low Voltage Directive 73/23/ECC, EN61010-1 (Class I, Pollution degree 2) | |
| Electromagnetic compatibility (*1, *2) | Conforms to the requirements of the directive and standard below. EMC Directive 89/336/ECC, EN61326, EN61000-3-2, EN61000-3-3 Applicable conditions: All cables and wires used to connect to this product must be shorter than 3 meters. Use the supplied test leads. | |
| Outside dimensions, weight | 320 (345) W × 88 (105) H × 270 (330) D mm, approx. 5 kg | |
| Accessories | 1 set of test leads (TL21-TOS: red and black, one each, with alligator clips) 1 flat probe (FP01-TOS), 1 spare fuse (15A, for EUT power) 1 instruction manual, 1 circuit principle diagram sticker 2 power cords (for the tester and for the EUT AC line) | |

[External dimensional drawings]

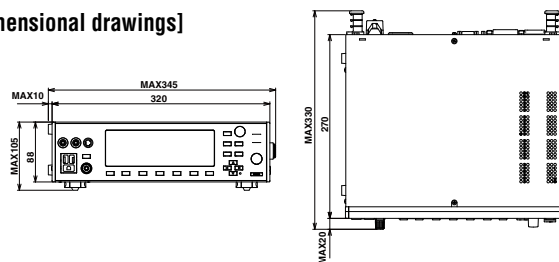

| Options | |
|-----------------------------|--|
| Product name/ model name | Test lead TL21-TOS (equivalent to the supplied lead) |
| | Flat probe FP01-TOS (equivalent to the supplied probe) |
| | Test probe HP21-TOS (with a start switch) |
| | Multi-output OT01-TOS (allows the connection of the different plugs used around the world) |
| | Rack mount bracket KRA3-TOS (inch type) |
| | Rack mount bracket KRA150-TOS (millimeter type) |



KIKUSUI ELECTRONICS CORPORATION

1-1-3, Higashiyamata, Tsuzuki-ku, Yokohama, 224-0023, Japan
Phone: (+81) 45-593-7570, Facsimile: (+81) 45-593-7571, www.kikusui.co.jp

●Affiliate companies:



KIKUSUI AMERICA, INC.

1744 Rollins Road, Burlingame, CA 94010
Phone: (650) 259-5900, Facsimile: (650) 259-5904
Toll Free: (1-800-KIKUSUI), www.kikusui.us



KIKUSUI TRADING (SHANGHAI) Co., Ltd.

Room D, 11F, Yonghua Bldg., No.138, Pudong Road,
Pudong New District, Shanghai City
Phone: 021-5887-9067, Facsimile: 021-5887-9069, www.kikusui.cn

For our local sales distributors and representatives, please refer to "sales network" of our website.

Printed in Japan

■Distributor:

■ All products contained in this catalogue are equipment and devices that are premised on use under the supervision of qualified personnel, and are not designed or produced for home-use or use by general consumers. ■ Specifications, design and so forth are subject to change without prior notice to improve the quality. ■ Product names and prices are subject to change and production may be discontinued when necessary. ■ Product names, company names and brand names contained in this catalogue represent the respective registered trade name or trade mark. ■ Colors, textures and so forth of photographs shown in this catalogue may differ from actual products due to a limited fidelity in printing. ■ Although every effort has been made to provide the information as accurate as possible for this catalogue, certain details have unavoidably been omitted due to limitations in space. ■ If you find any misprints or errors in this catalogue, it would be appreciated if you would inform us. ■ Please contact our distributors to confirm specifications, price, accessories or anything that may be unclear when placing an order or concluding a purchasing agreement.

Issue:Jan.2007 2007013KEMSEC11